

Transparent Extruded TTE1005 Light Strip



- Transparent hollow silicone extrusion molded product 10x5mm, adopts new industrial design, minimalist aesthetics, high-grade texture.
- ERP standard spectrum classification, single BIN supply, exceptional color consistency.
- Uses food-grade silicone material, one-piece extrusion molding process.
- Single-end power supply supports 5-meter wiring.
- Yellowing resistance, high temperature and corrosion resistance, simple installation.
- Waterproof rating IP65.
- Three-year warranty.

Technologies

- ON/OFF


General Application

- This product is suitable for home decoration: engineering projects, large buildings, hotels, shopping malls, indirect lighting, recessed lighting, decorative lighting and other applications.


Color Options




Dimension



Beam Angle

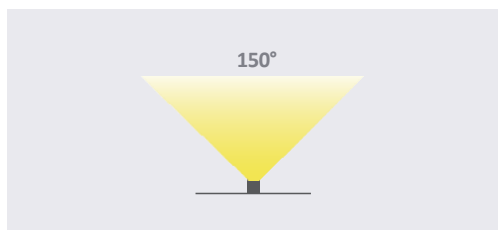

Sectional Drawing



Product Specifications

P/N	LED	CCT k	CRI	LEDs/M	LUMENS (lm/m)	Voltage (v)	Current (mA/M)	Power (W/M)	Cut Length (MM)	Max Run (M)	IP Rated
COB15-930-TTE1005	COB	3000K	80/90	512	1200	24	625	15	25	5	67
COB10-930-TTE1005		3000K		480	900		417	10	50		67
COB05-930-TTE1005		3000K		320	400		208	5	50		65

Other Specifications

Protection grade	IP65
Working temperature(°c)	-25~+60
Storage environment temperature (°c)	-25~+70
Standard length	5
Maximum cascade length(m)	5
weight	/





Remark

- The test environment temperature is 25±2°C;
- The above data are typical values, the actual parameters of the product may be different from the typical data; the data is subject to change without notice;
- The above "/" means that this parameter is not required for the time being.

Applied Standards




Installation

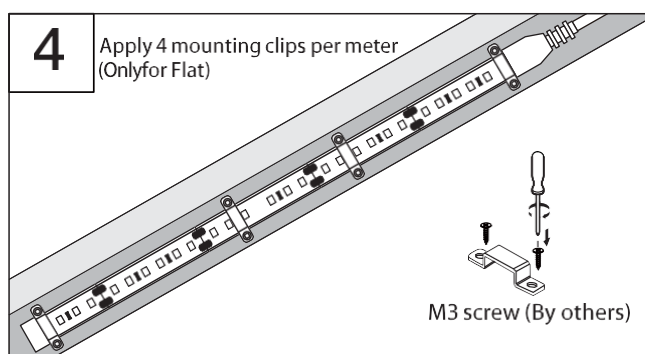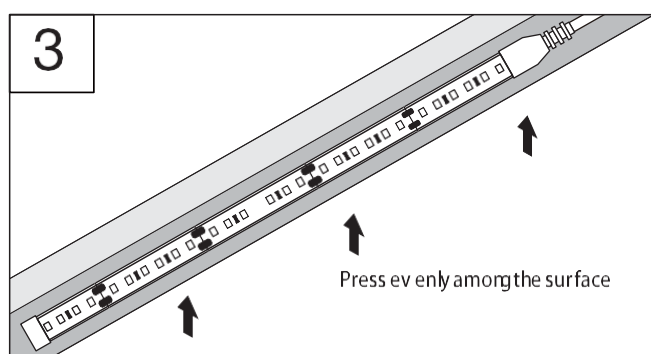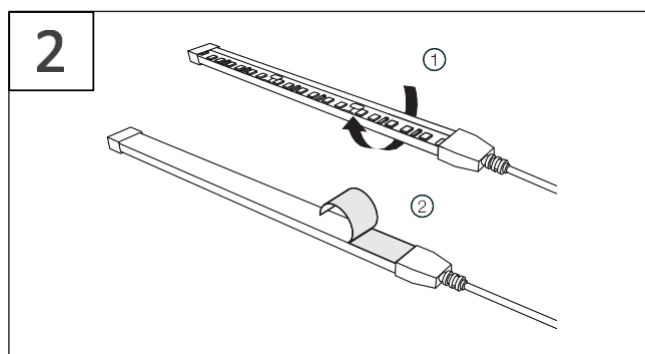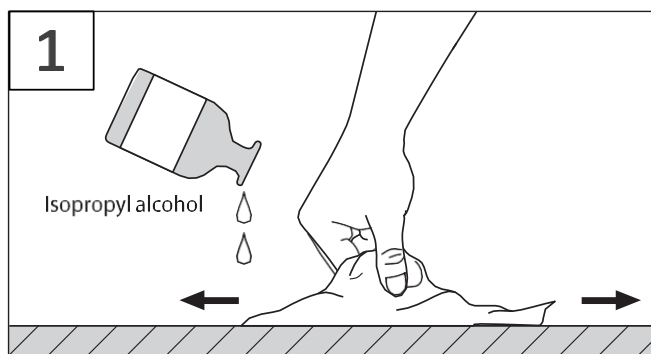


Do's and Don'ts

Minimum Bending Radius

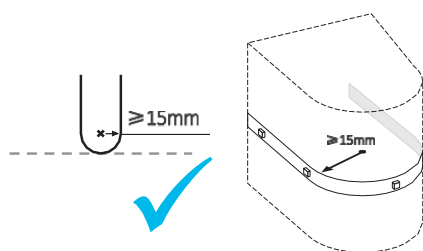


Do Not Twist

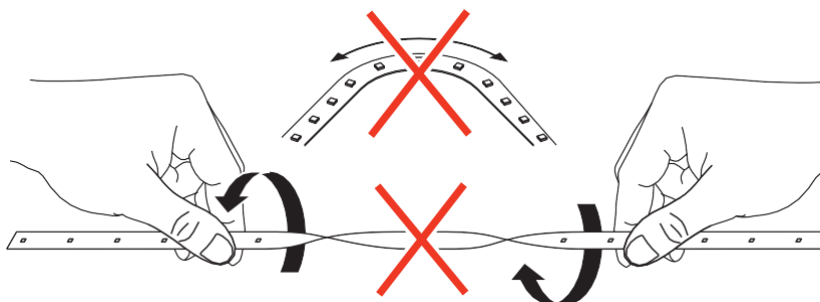


Note: During bending operations, please follow the standard operations in the above diagram. Excessively small bending angles or non-standard operations will cause adverse effects to the product's internals.

Schematic diagram of electrical connection


Monochrome temperature wiring diagram 1: Power + lamp belt connection mode

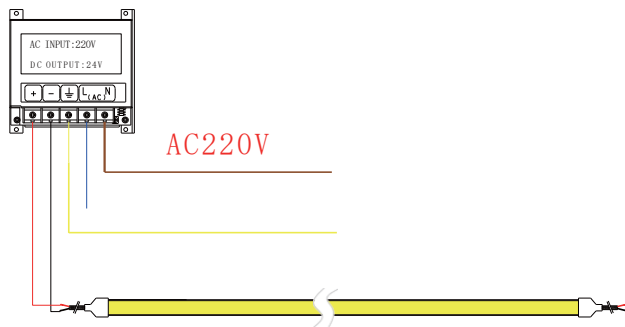


Package




Reel



Electrostatic bag

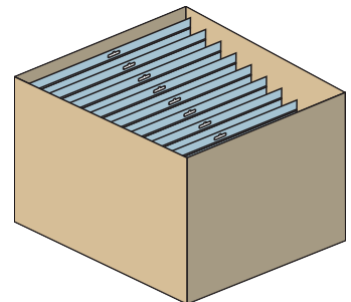

Carton



Packing completed

Quantity per roll (m)	Quantity per case (m)	Total weight (Kg)	Outer box dimensions (mm)		
			Length	Width	Height
5	100	≤ 20	415	385	275

Note :The above-mentioned packaging quantity and weight are only for the packaging method shown in the figure. There will be differences in the number and weight of packaging for other packaging methods, and the actual product shall prevail.

Common product faults and their troubleshooting methods

Fault Phenomena	Possible Causes	Troubleshooting Methods
All lights off	1.Mains power failure	Power on
	2.Open circuit or short circuit at switching power supply output triggering auto-protection	Troubleshoot and restore power
	3.Reverse polarity at LED strip power input	Check wire connection status to ensure correct polarity
Partial lights off	1.Partial switching power supply failure	Inspect power supply system and resolve faults
	2.Wiring error in partial LED strip circuits	
	3.Reverse polarity in partial LED strips	Correct wiring
LED uneven brightness or insufficient brightness	1.Power supply overload	Replace with higher-power supply according to load
	2.Excessive line loss in switching power circuits or significant line loss discrepancies	Maintain LED strip operating voltage within $\pm 5\%$ of rated voltage 1. Shorten power cable length between power supply and LED strip or use larger gauge wires; 2. Ensure number of LED strips per circuit $\leq$ max allowed cascading quantity and keep cascading quantities similar per circuit).
	3.Excessive serial connection of LED strips	Adjust LED strip quantity per power branch to meet max allowed cascading requirements per circuit
LED flickering	1.Poor contact at connection points	Identify and resolve poor contact points
	2.Switching power supply malfunction	Replace switching power supply

Notice

- If the external flexible cable of this product is damaged, the cable must be replaced by the manufacturer or similarly qualified personnel to prevent hazards.
- For specific installation arrangements and precautions, refer to the product user manual.
- Data in this specification is based on standard products, Actual delivered products may vary, subject to physical measurements
- All product diagrams in this specification are schematic diagrams, Actual delivered products may differ, subject to physical objects
- Technical modifications may be implemented without prior notice.
- Shenzhen Meishang Lighting Co., Ltd. reserves the final interpretation rights of this manual.