LEDDOMAIN
RE-LIFE YOUR FUTURE

Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. High efficiency constant current driver, ensure the light source is maximum used. can be easily installed in any type of space, to create amazing light effects, The LED is set back to minimize glare. The main body is made of die-cast aluminum that guarantees optimum heat dissipation with single optic lens family in the most popular sizes and beams with excellent color rendering, and Supreme light quality.

FIELDS OF APPLICATION:

Garden, landscape lighting, etc.

The GRAN In-ground light adaptable for outdoor applications.

High Lumen Efficacy 115 lm/W
Front cover - Stainless Steel SUS 316L
Body - die-casting grey powder coated aluminum
T - 60-80um Adhesion of IOS class1
Optical lens efficiency>90%
PCB High heart-conductive rata aluminum,conductivity>2.0w/mk
Driver - High efficiency, low flicker driver
Gasket - Molding shaped silicone seal
Wire - 0.3m H05RN-F 2X1.0mm2
Glowing Wire Test - 850°
Cable gland - Nickel coated copper/ABS
Mounting sleeve - ABS/PVC Temperature - of=20 °C ~ of max=40 °C

Model --- **GRAN**

GRAN-A-1-25-27-W-1.5W



GRAN X X X X X

- Size — A
- Driver — 1 On\Off; 2 Dali; 3 1-10; 4 Phase Dimming; 5 RGBW; 6 Casambi; 7 Tuya
- Beam Angle — 25°
- Kelvin — 27 2700k; 30 3000k; 40 4000k; 50 5000k; 60 6000k; TUN Tunable; 1 RGB; 2 RGBW
- Finishing — W white; B black; G grey; X as per requested
- Wattage — 1.5

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.

IP68 | COB | McA Step 3 | 24V DC

LIGHTING SOLUTIONS
TRIDONIC
OSRAM
CREE

A - Ø **55-43mm**

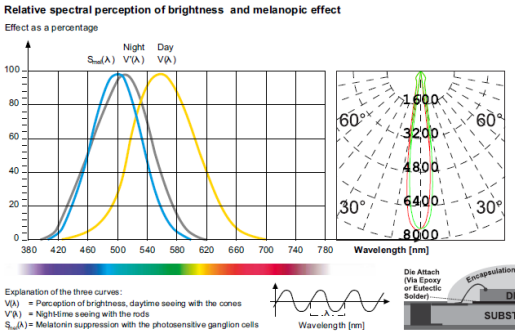

Available Accessories

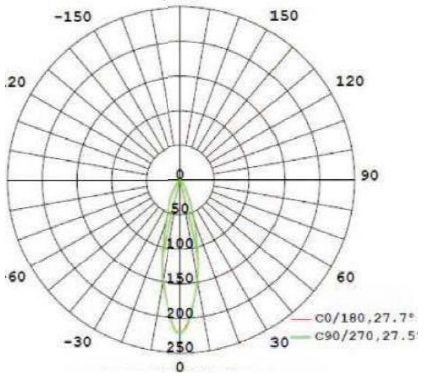

LED life time			Operating time 1.000 h										
Lamp Lumen Maintenance Factor			1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor			1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99

A++ ENERGY LEVEL | LED | AC220 -240V | series wiring | CASAMBI | DALI | FLICKER FREE | LM-80