



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. High efficiency constant current driver, ensure the light source is maximum used. can be easily installed in any type of space, to create amazing light effects, The LED is set back to minimize glare. The main body is made of die-cast aluminum that guarantees optimum heat dissipation, with Premium aluminum reflectors with different sizes and high-quality light. The typical beam angle change by different color, chip size and chip position.

FIELDS OF APPLICATION:

Living spaces, villas, residential, offices, showrooms, hotels, restaurants, buildings, hospitals, shopping malls, supermarket, etc.


The SALI Recessed ceiling luminaries adaptable for indoor applications.

High Lumen Efficacy 115 lm/W - UGR<19
Body - Die cast aluminum housing with solvent free powder coating Reflector - Anodized aluminum
Diffuser - polycarbonate pattern lens
Glowing Wire Test - 850°
Temperature - of=20 °C ~ of max=50 °C

SALI-A-1-15-27-W-30W



Model --- **SALI**

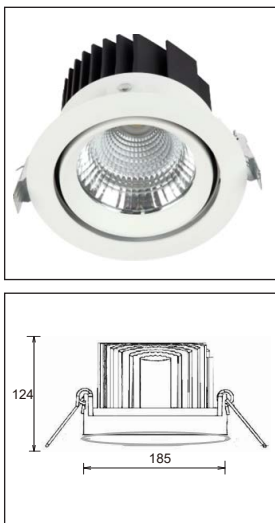

A - Ø 185-124mm 172mm

SALI

X	X	X	X	X	Size	A	
					Driver	1 2 3 4 5 6 7	
						On/Off Dali 1-10 Phase Dimming RGBW Casambi Tuya	
					Beam Angle	15° 24° 36° 60°	
					Kelvin	27 30 40 50 60 TUN 1 2	
						2700k 3000k 4000k 5000k 6000k Tunable RGB RGBW	
					Finishing	W B S X	
						white black silver as per requested	
					Wattage	30 35 40 45 50	

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.

IP20




McA Step 3

220-240V



Relative spectral perception of brightness and melanopic effect



Effect as a percentage

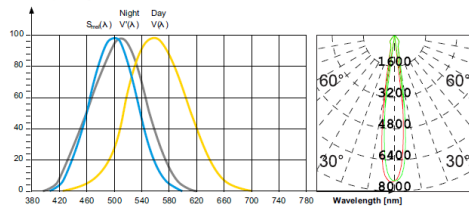


Explanation of the three curves:
V(A) = Perception of brightness, daytime seeing with the cones
V(A) = Nighttime seeing with the rods
S_{DA}(A) = Melanin suppression with the photosensitive ganglion cells




Available Accessories




Diameter(m)	Height Emax
0.42	1.5m 135lx
0.63	2.25m 601lx
0.99	3.5m 249lx
1.13	4.0m 190lx
1.41	5.0m 122lx



Diameter(m)	Height Emax
0.57	1.5m 969lx
0.86	2.25m 431lx
1.34	3.5m 178lx
1.53	4.0m 136lx
1.91	5.0m 87lx



Diameter(m)	Height Emax
0.94	1.5m 509lx
1.41	2.25m 226lx
2.20	3.5m 94lx
2.51	4.0m 72lx
3.14	5.0m 46lx



Diameter(m)	Height Emax
1.60	1.5m 601lx
2.40	2.25m 267lx
3.73	3.5m 110lx
4.26	4.0m 85lx
5.33	5.0m 54lx

LED life time

		Operating time 1.000 h										
Lamp Lumen Maintenance Factor		1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor		1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99

