



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. High efficiency constant current driver, ensure the light source is maximum used. can be easily installed in any type of space, to create amazing light effects, The LED is set back to minimize glare. The main body is made of die-cast aluminum that guarantees optimum heat dissipation, with Premium aluminum reflectors with different sizes and high-quality light. The typical beam angle change by different color, chip size and chip position.

FIELDS OF APPLICATION:

Living spaces, villas, residential, offices, showrooms, hotels, restaurants, buildings, hospitals, shopping malls, supermarket, museums, convention centers, galleries, etc.

The REVO Recessed ceiling luminaires adaptable for indoor applications.

High Lumen Efficacy 115 lm/W - UGR<19
Body - Die cast aluminum housing with solvent free powder coating Reflector - Anodized aluminum
Diffuser - polycarbonate pattern lens
Glowing Wire Test - 850°
Temperature - of=20 °C ~ of max=50 °C

REVO-A-1-15-27-W-5W



Model --- **REVO**



REVO

X	X	X	X	X	Size	A — B — C									
					Driver	1	2	3	4	5	6	7			
						On/Off	Dali	1-10	Phase Dimming	RGBW	Casambi	Tuya			
					Beam Angle	15°			24°	36°	60°				
					Kelvin	27	30	40	50	60	TUN	1	2		
						2700k	3000k	4000k	5000k	6000k	Tunable	RGB	RGBW		
					Finishing	W			B			S	X		
						white			black			silver	as per requested		
						5	8	10	12	18	20				

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.

IP44



McA Step 3


220-240V





A - Ø	65-60mm	56mm
B - Ø	100-85mm	90mm
C - Ø	105-92mm	90mm

Relative spectral perception of brightness and melanopic effect


Effect as a percentage

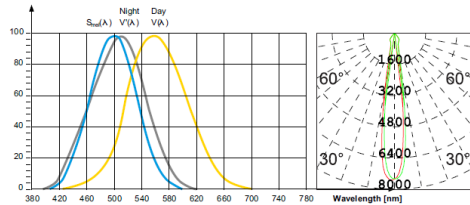

Explanation of the three curves:
V_l(λ) = Perception of brightness, daytime seeing with the cones
V_l(λ) = Nighttime seeing with the rods
S_{rel}(λ) = Melanin suppression with the photosensitive ganglion cells



Available Accessories

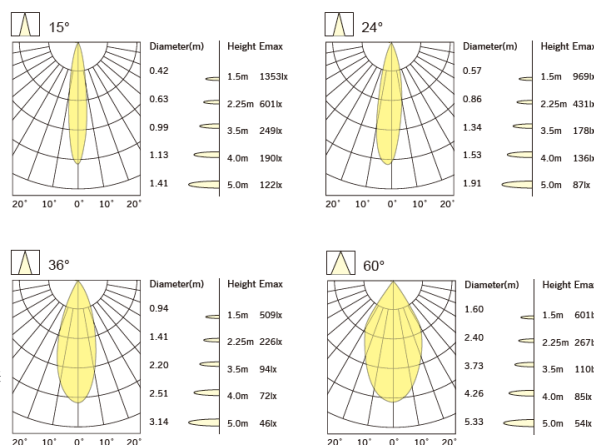

LED life time

Operating time 1.000 h

Lamp Lumen Maintenance Factor			1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor			1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99

