



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. High efficiency constant current driver, ensure the light source is maximum used. can be easily installed in any type of space, to create amazing light effects, The LED is set back to minimize glare. The main body is made of die-cast aluminum that guarantees optimum heat dissipation with single optic lens family in the most popular sizes and beams with excellent color rendering, and Supreme light quality.

FIELDS OF APPLICATION:

Living spaces, villas, residential, offices, showrooms, hotels, restaurants, buildings, hospitals, shopping malls, supermarket, convention centers, galleries, etc.

The SAGA Recessed ceiling luminaires adaptable for indoor applications.

High Lumen Efficacy 115 lm/W - UGR<19
Body - Die cast aluminum housing with solvent free powder coating
Diffuser - polycarbonate pattern lens
Glowing Wire Test - 850°
Temperature - of=20 °C ~ of max=50 °C

SAGA-A-1-36-27-W-8W



Model --- **SAGA**



SAGA

X X X X X

↓	Size	A — B — C — D										
	Driver	1	2	3	4	5	6	7				
		On/Off	Dali	1-10	Phase Dimming	RGBW	Casambi	Tuya				
	Beam Angle	36° — 50° — 60° — 70°										
	Kelvin	27	30	40	50	60	TUN	1	2			
		2700k	3000k	4000k	5000k	6000k	Tunable	RGB	RGBW			
	Finishing	W — B — S — X										
		white	black		silver		as per requested					
Wattage	8	10	12	18	20	24	30	35	40	45	50	

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.

IP54



McA Step 3


220-240V




A - Ø	100-65mm	80mm
B - Ø	145-75mm	125mm
C - Ø	190-90mm	180mm
D - Ø	235-100mm	210mm

Relative spectral perception of brightness and melanopic effect


Effect as a percentage

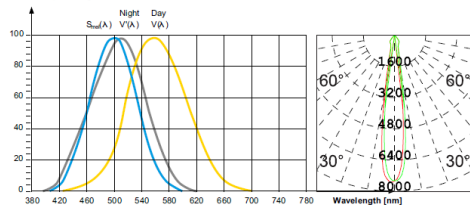

Explanation of the three curves:
V(A) = Perception of brightness, daytime seeing with the cones
V(A) = Nighttime seeing with the rods
S_{DA}(A) = Melanopic suppression with the photosensitive ganglion cells



Available Accessories

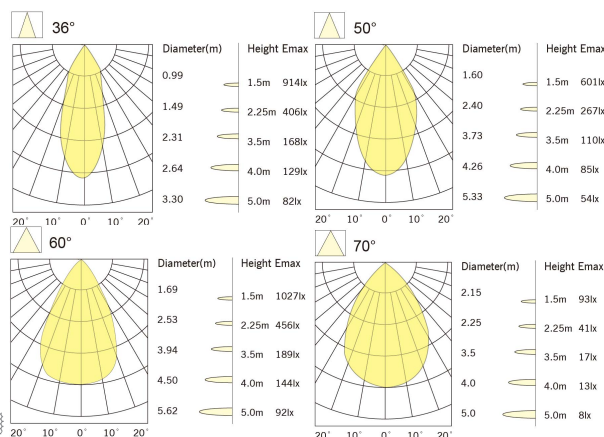

LED life time			Operating time 1.000 h										
Lamp Lumen Maintenance Factor			1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor			1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99

