

CRI: 90
Led Qty: 320LEDS/M
Length/Reel: 5M - 10M
Working Temperature:- 20~50°C
Storage Temperature: -30~80°C
Voltage Range: 23 ~25V dc
Reverse Voltage: : 25V dc



The diagram shows a 4-pin connector with the following specifications:

- Size:** 1 (On/Off), 2 (Dali), 3 (1-10), 4 (Phase Dimming), 5 (RGBW), 6 (Casambi), 7 (Tuya)
- Driver:** 27 (2700k), 30 (3000k), 40 (4000k), 50 (5000k), 60 (6000k), TUN (Tunable), 1 (RGB), 2 (RGBW)
- Kelvin:** 2700k, 3000k, 4000k, 5000k, 6000k, Tunable, RGB, RGBW
- Wattage/M:** 5

IP20 COB 24V 320LED 5W/M




360mm(14.17')

10mm(0.39')

100mm(3.93') Cutting Length

5004mm(197.01') Max Run

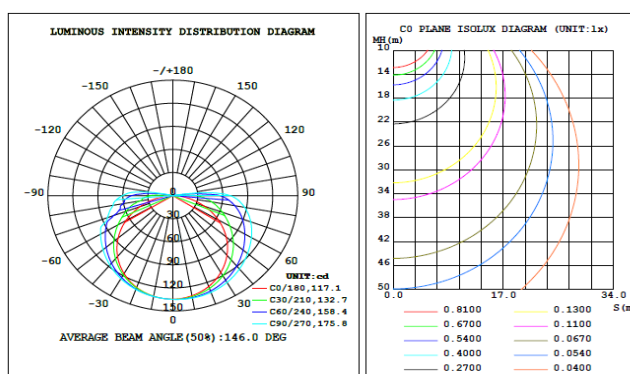

LED life time			Operating time 1.000 h										
Lamp Lumen Maintenance Factor			1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor			1	1	1	1	1	1	1	0.99	0.99	0.99	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99



LED

AC220
-240V

series wiring



LM-80

