

CRI: 90
Led Qty: 480LEDS/M
Length/Reel: 5M - 10M
Width: 8MM
Working Temperature:- 20~50°
C Storage Temperature: -30~80°
C Voltage Range: 23 ~25V dc
Reverse Voltage: : 25V dc



The diagram illustrates how different specifications are determined by the number of LEDs per meter (X). The specifications are categorized into three groups based on the number of LEDs per meter:

- Size:** Determined by the number of LEDs per meter (X).
- Driver:** Determined by the number of LEDs per meter (X).
- Kelvin:** Determined by the number of LEDs per meter (X).
- Wattage/M:** Determined by the number of LEDs per meter (X).

The specifications are categorized into three groups based on the number of LEDs per meter:

- Size:** Determined by the number of LEDs per meter (X).
- Driver:** Determined by the number of LEDs per meter (X).
- Kelvin:** Determined by the number of LEDs per meter (X).
- Wattage/M:** Determined by the number of LEDs per meter (X).



The specifications are categorized into three groups based on the number of LEDs per meter:

- Size:** Determined by the number of LEDs per meter (X).
- Driver:** Determined by the number of LEDs per meter (X).
- Kelvin:** Determined by the number of LEDs per meter (X).
- Wattage/M:** Determined by the number of LEDs per meter (X).

IP20 COB 24V 480LED 8W/M



DIMENSION

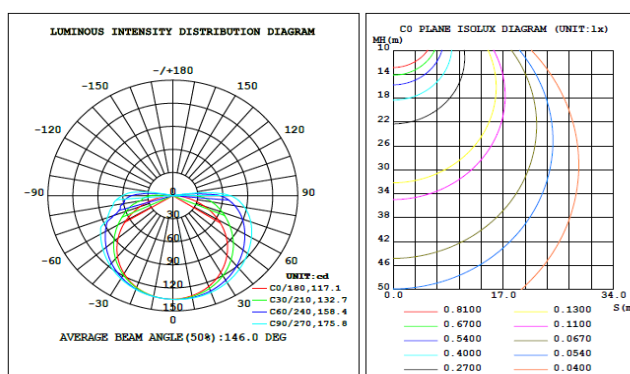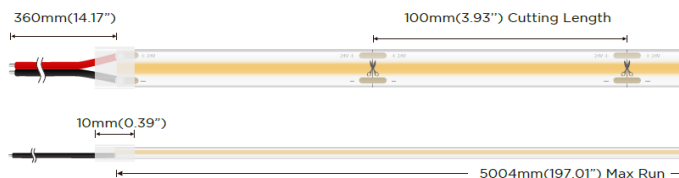

LED life time			Operating time 1.000 h										
Lamp Lumen Maintenance Factor			1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor			1	1	1	1	1	1	1	0.99	0.99	0.99	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99



LED

AC220
-240V

series wiring



LM-80

