



CRI: 90
Led Qty: 480EDS/M
Length/Reel: 5M - 10M
Width: 8MM
Working Temperature:- 20~50°C
Storage Temperature: -30~80°C
Voltage Range: 23 ~25V dc
Reverse Voltage: : 25V dc

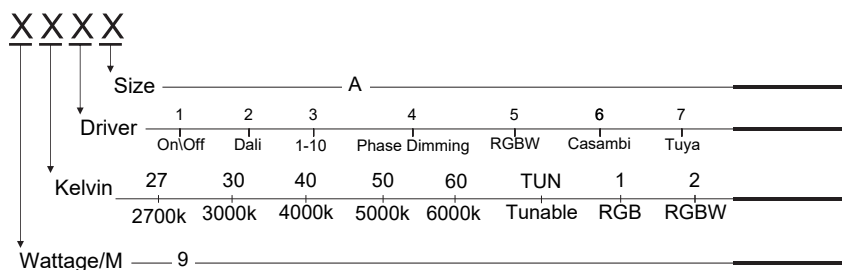

IP20 COB 24V 480LED 9W/M

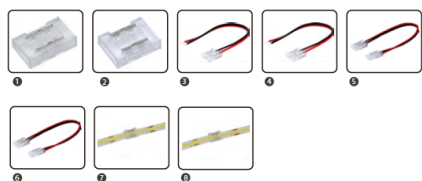

Technical drawing of the 5004mm Max Run cable assembly. The drawing shows a side view of the cable with a red jacket and a yellow jacket. The dimensions are as follows:

- 360mm (14.17") for the red jacket section.
- 100mm (3.93") Cutting Length for the yellow jacket section.
- 10mm (0.39") for the yellow jacket section.
- 5004mm (197.01") Max Run for the total length of the cable.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

UNIT: cd

CO/180, 117.1
 C30/210, 132.7
 C60/240, 150.4
 C90/270, 175.8

AVERAGE BEAM ANGLE (50%): 146.0 DEG

CO PLANE ISOLUX DIAGRAM (UNIT:lx)

0.8100 0.1300
 0.6700 0.1100
 0.5400 0.0670
 0.4000 0.0540
 0.2700 0.0400

LED life time			Operating time 1.000 h										
Lamp Lumen Maintenance Factor			1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor			1	1	1	1	1	1	1	0.99	0.99	0.99	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99

AC220
-240V

CASAM



LM-80

