


CRI: 90
Led Qty: 480EDS/M
Length/Reel: 5M - 10M
Width: 8MM
Working Temperature:- 20~50°C
Storage Temperature: -30~80°C
Voltage Range: 23 ~25V dc
Reverse Voltage: : 25V dc

Diagram illustrating the pinout for the LED strip. The top row of pins is labeled X X X X. Arrows point from these pins to labels: Size, Driver, Kelvin, and Wattage/M. Below these labels are specific values for each pin: 1 (On/Off), 2 (Dali), 3 (1-10), 4 (Phase Dimming), 5 (RGBW), 6 (Casambi), 7 (Tuya). Below these are Kelvin values: 27 (2700k), 30 (3000k), 40 (4000k), 50 (5000k), 60 (6000k), TUN (Tunable), 1 (RGB), 2 (RGBW).

IP65 COB 24V 480LED 9W/M

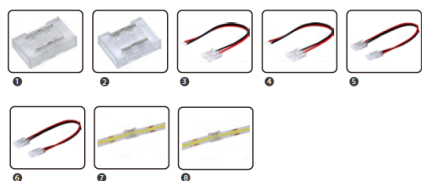

360mm(14.17")

10mm(0.39")

100mm(3.93") Cutting Length

5004mm(197.01") Max Run

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

UNIT: cd

CO/180, 117.1
 C30/210, 132.7
 C60/240, 150.4
 C90/270, 175.8

AVERAGE BEAM ANGLE (50%): 146.0 DEG

CO PLANE ISOLUX DIAGRAM (UNIT:lx)

ML(m)

0.0 17.0 34.0 S(m)

0.8100 0.1300
 0.6700 0.1100
 0.5400 0.0670
 0.4000 0.0540
 0.2700 0.0400

LED life time			Operating time 1.000 h										
Lamp Lumen Maintenance Factor			1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor			1	1	1	1	1	1	1	0.99	0.99	0.99	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99

AC220
-240V

CASAM



LM-80

