



CRI: 90
Led Qty: 480EDS/M
Length/Reel: 5M - 10M
Width: 8MM
Working Temperature:- 20~50°C
Storage Temperature: -30~80°C
Voltage Range: 23 ~25V dc
Reverse Voltage: : 25V dc

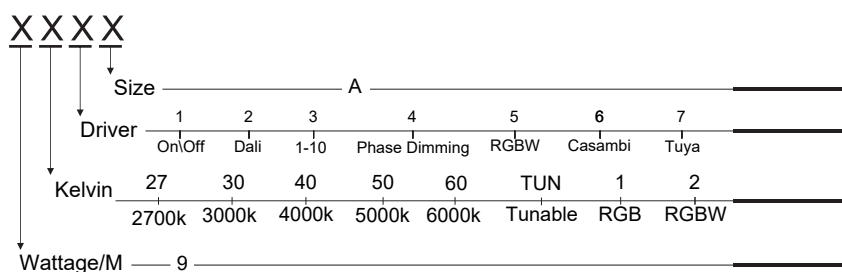

IP65 COB 24V 480LED 9W/M

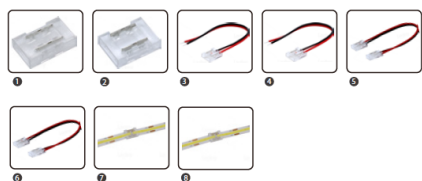

360mm(14.17')

10mm(0.39')

100mm(3.93') Cutting Length

5004mm(197.01') Max Run

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

UNIT: cd

CO/180, 117.1
 C30/210, 132.7
 C60/240, 150.4
 C90/270, 175.8

AVERAGE BEAM ANGLE (50%): 146.0 DEG

CO PLANE ISOLUX DIAGRAM (UNIT:lx)

ML(m)

0.0 17.0 34.0 S(m)

0.8100 0.1300
 0.6700 0.1100
 0.5400 0.0670
 0.4000 0.0540
 0.2700 0.0400

AC220
-240V

LM-80

