



CRI: 90
Led Qty: 480EDS/M
Length/Reel: 5M - 10M
Width: 8MM
Working Temperature:- 20~50°C
Storage Temperature: -30~80°C
Voltage Range: 23 ~25V dc
Reverse Voltage: : 25V dc

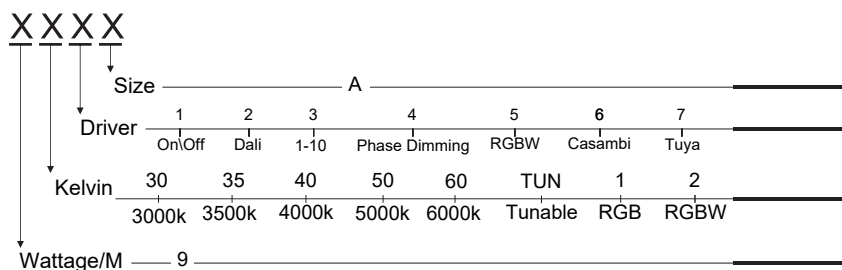

IP20 COB 24V 480LED 9W/M

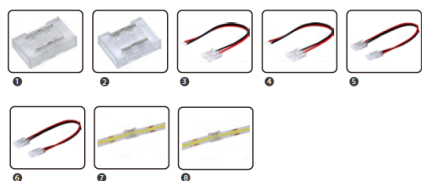

360mm(14.17')

100mm(3.93') Cutting Length

10mm(0.39')

5004mm(197.01') Max Run

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

UNIT: lx

CO PLANE ISOLUX DIAGRAM (UNIT:lx)

Legend for Luminous Intensity Distribution Diagram:

- 0°/180°: 17.1
- 30°/210°: 132.7
- 60°/240°: 150.4
- 90°/270°: 175.8

AVERAGE BEAM ANGLE (50%): 146.0 DEG

Legend for CO Plane Isolux Diagram (UNIT:lx):

- 0.8100
- 0.6700
- 0.5400
- 0.4000
- 0.2700
- 0.1300
- 0.1100
- 0.0670
- 0.0540
- 0.0400

LED life time			Operating time 1.000 h										
Lamp Lumen Maintenance Factor			1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor			1	1	1	1	1	1	1	0.99	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99

AC220
-240V

CASAM



LM-80

