



CRI: 90
Led Qty: 480EDS/M
Length/Reel: 5M - 10M
Width: 8MM
Working Temperature:- 20~50°C
Storage Temperature: -30~80°C
Voltage Range: 23 ~25V dc
Reverse Voltage: : 25V dc

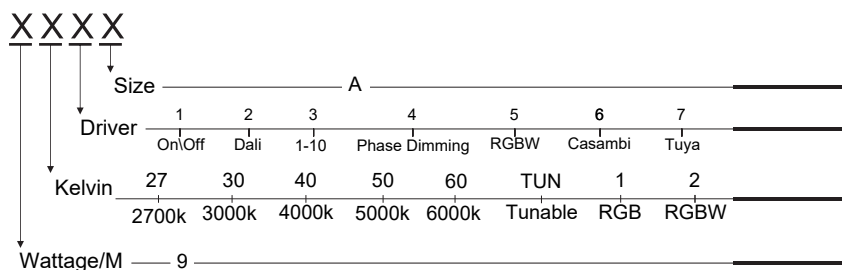

IP65 COB 24V 480LED 9W/M

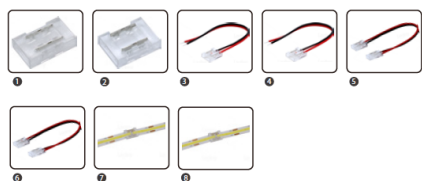

Technical drawing of the 5004mm Max Run cable assembly. The drawing shows a side view of the cable with a red and black outer jacket, a yellow braided shield, and a white inner insulation. The dimensions are as follows:

- Overall length: 5004mm (197.01") Max Run
- Inner insulation thickness: 10mm (0.39")
- Outer jacket thickness: 360mm (14.17")
- Cutting length: 100mm (3.93")
- Dimensions of the braided shield and inner insulation: 100mm (3.93")
- Dimensions of the outer jacket: 100mm (3.93")

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

UNIT: cd

CO/180, 117.1
 C30/210, 132.7
 C60/240, 150.4
 C90/270, 175.8

AVERAGE BEAM ANGLE (50%): 146.0 DEG

CO PLANE ISOLUX DIAGRAM (UNIT: lx)

ML(m)

0.0 17.0 34.0

0.8100 0.6700 0.5400 0.4000 0.2700 0.1300 0.1100 0.0670 0.0540 0.0400

LED life time			Operating time 1.000 h										
Lamp Lumen Maintenance Factor			1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor			1	1	1	1	1	1	1	0.99	0.99	0.99	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99

AC220
-240V

LM-80

