



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. High efficiency constant current driver, ensure the light source is maximum used. can be easily installed in any type of space, to create amazing light effects. The LED is set back to minimize glare. The main body is made of die-cast aluminum that guarantees optimum heat dissipation, with Premium aluminum reflectors with different sizes and high-quality light. The typical beam angle change by different color, chip size and chip position.

FIELDS OF APPLICATION:

Showrooms, hotels, buildings, shopping malls, galleries, etc.


The LILY Surface ceiling luminaires adaptable for indoor application.

High Lumen Efficacy 115 lm/W - UGR<19
Body - Die cast aluminum housing with solvent free powder coating
Reflector - Anodized aluminum
Diffuser - polycarbonate pattern lens
Glowing Wire Test - 850°
Temperature - of=20 °C ~ of max=50 °C

LILY-A-1-15-27-W-7W



Model --- **LILY**

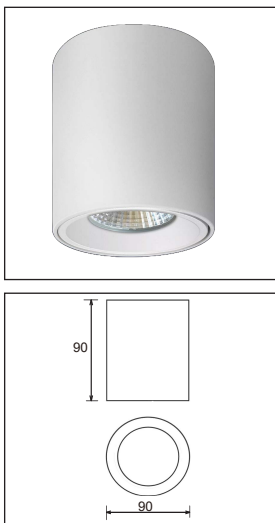

LILY

X X X X X

Size	A — B — C — D — E									
Driver	1	2	3	4	5	6	7			
	On/Off	Dali	1-10	Phase Dimming	RGBW	Casambi	Tuya			
Beam Angle	36° — 50° — 60° — 70°									
	27	30	40	50	60	TUN	1	2		
	2700k	3000k	4000k	5000k	6000k	Tunable	RGB	RGBW		
	W		B		S		X			
	white		black		silver		as per requested			
	10	12	18	20	24	30	35	40	45	50

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.

IP44



McA Step 3

220-240V



A - Ø 90-90mm


B - Ø 110-120mm

C - Ø 130-155mm



D - Ø 170-184mm

E - Ø 195-195mm

Relative spectral perception of brightness and melanopic effect
Effect as a percentage

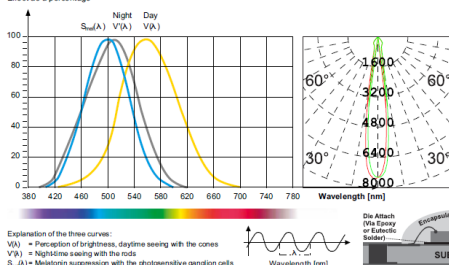

Available Accessories

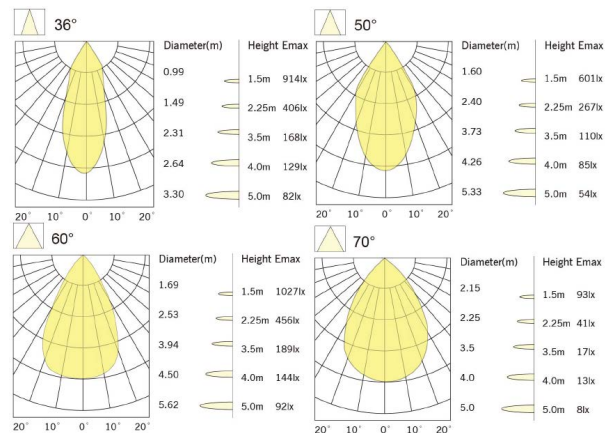

LED life time

Lamp Lumen Maintenance Factor			1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor			1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99



LED

AC220-240V

series wiring

