



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.

FIELDS OF APPLICATION

Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 115lm/W

Body - Die cast aluminum housing with solvent free powder coating


Diffuser - PMMA polycarbonate pattern lens.

Glowing Wire Test - 850°

Temperature - $t_a=20\text{ }^{\circ}\text{C} \sim t_a \text{ max}=50\text{ }^{\circ}\text{C}$

Class - III

Model --- ROYAL



A - Ø 65-170mm

B - Ø 75-190mm

Default Available

ROYAL-A-0-15-27-W-4W-IP20



Product Assistant Chart

ROYAL

X

X

X

X

X

Size

A

B

Driver

0

1

2

3

4

On/Off

Dali

Dimmable

Phase Dimming

1-10

Beam Angle

15

24

36

45

60

Kelvin

27

30

40

50

60

2700K

3000K

4000K

5000K

6000K

Finishing

W

B

white

black

Wattage

8

10

12

15

20

25


30

Lighting Customization Solution: can offer you modifications for environment with higher options as a customized product.








COB McA Step 3 220~240V



VS LIGHTING SOLUTIONS
TRIDONIC

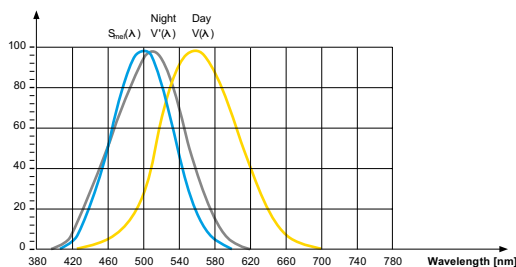

Explanation of the three curves:
V(A) = Perception of brightness, daytime seeing with the cones
V(A) = Night-time seeing with the rods
S_m(A) = Melatonin suppression with the photosensitive ganglion cells



LED life time			Operating time 1.000 h										
Lamp Lumen Maintenance Factor			1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor			1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99



LED

CRP 90

series wiring

F

RoHS COMPLIANT

CE

COMPLIANCE

UV

CIDET

LM-80

ENERGY STAR

FLICKER FREE