



Flexible 0408 Neon Strip Specification

- Side Bend

Model:

ST-LD-NEO-85104-5W-3K-0408-IP67

Key Features

- ✧ DC24V low voltage input
- ✧ Silicon extrusion process
- ✧ Uniform light emission, good appearance consistency
- ✧ Anti-yellowing, high temperature resistance, corrosion resistance, weak acid and alkali resistance
- ✧ Good flexibility, small size, light weight, easy installation
- ✧ IP67
- ✧ 3 years warranty

General application



Decorative Light

Applied standards



General information



No.	Item	Spec
1	Name	4*8mm Neon Strip-Side bending
2	FPC	5mm
3	Voltage	24VDC
4	LED package	2835
5	LED quantity	168LED/M
6	CCT	2700/3000/4000/5700K
7	CRI	90
8	Power	4W/M
9	Length	5M/Roll, 10M/Roll, customized length available
10	Tube material	Silicone
11	IP Rating	IP67
12	Operation temperature	-20~+60C
13	Storage temperature	-40~+80C
14	End cap	Molding end cap
15	Min.cut	35.7mm

Remark:

(1) The test environment temperature is $25 \pm 2^{\circ}\text{C}$;


(2) The above data are typical values, the actual parameters of the product may be different from the typical data; the data is subject to change without notice;

Size and outline(unit: mm)

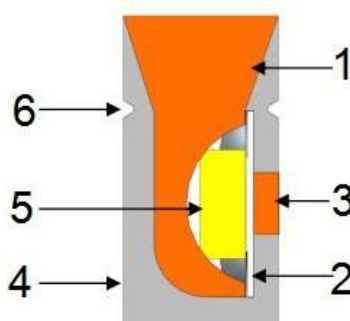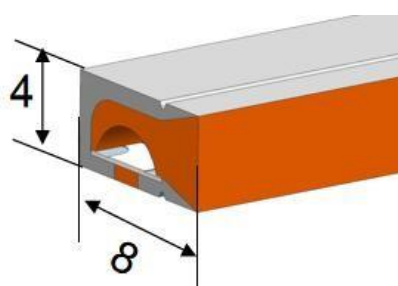


1. Emitting Face
2. FPC
3. Mark for cut
4. Light shield layer
5. LED
6. Installation slo


Installation :

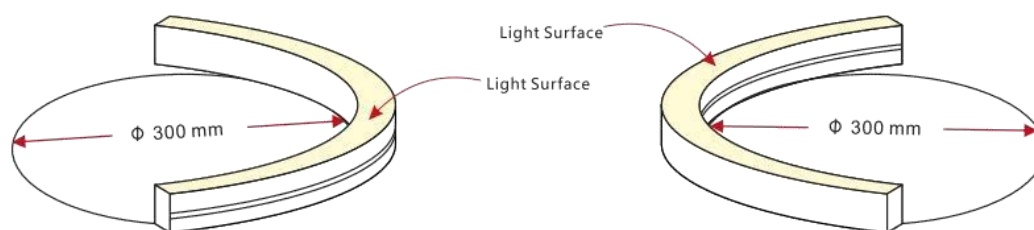

Mounting with clips

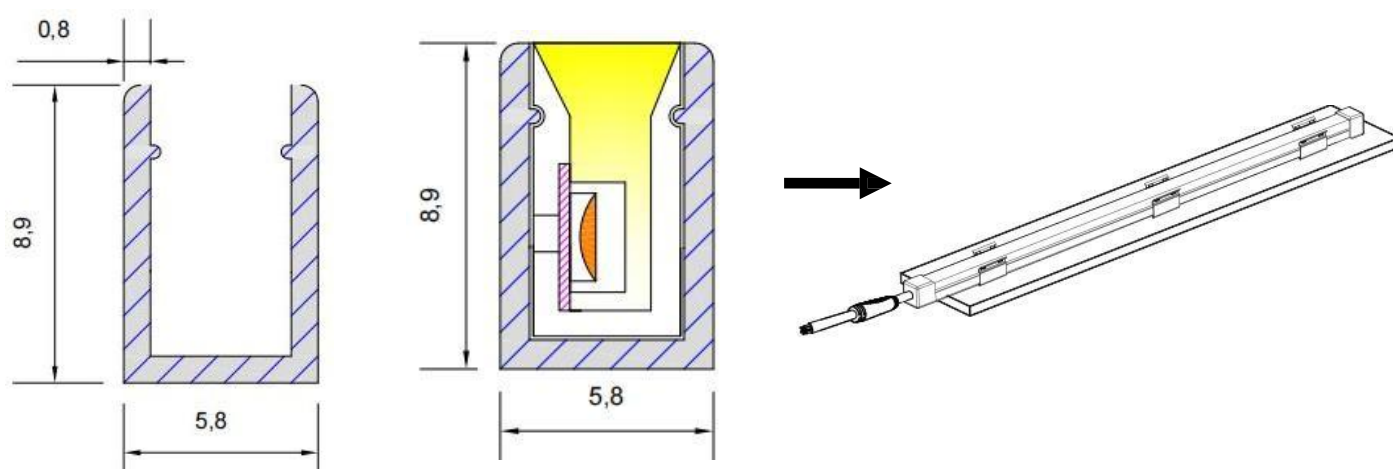

Mounting with aluminium profiles

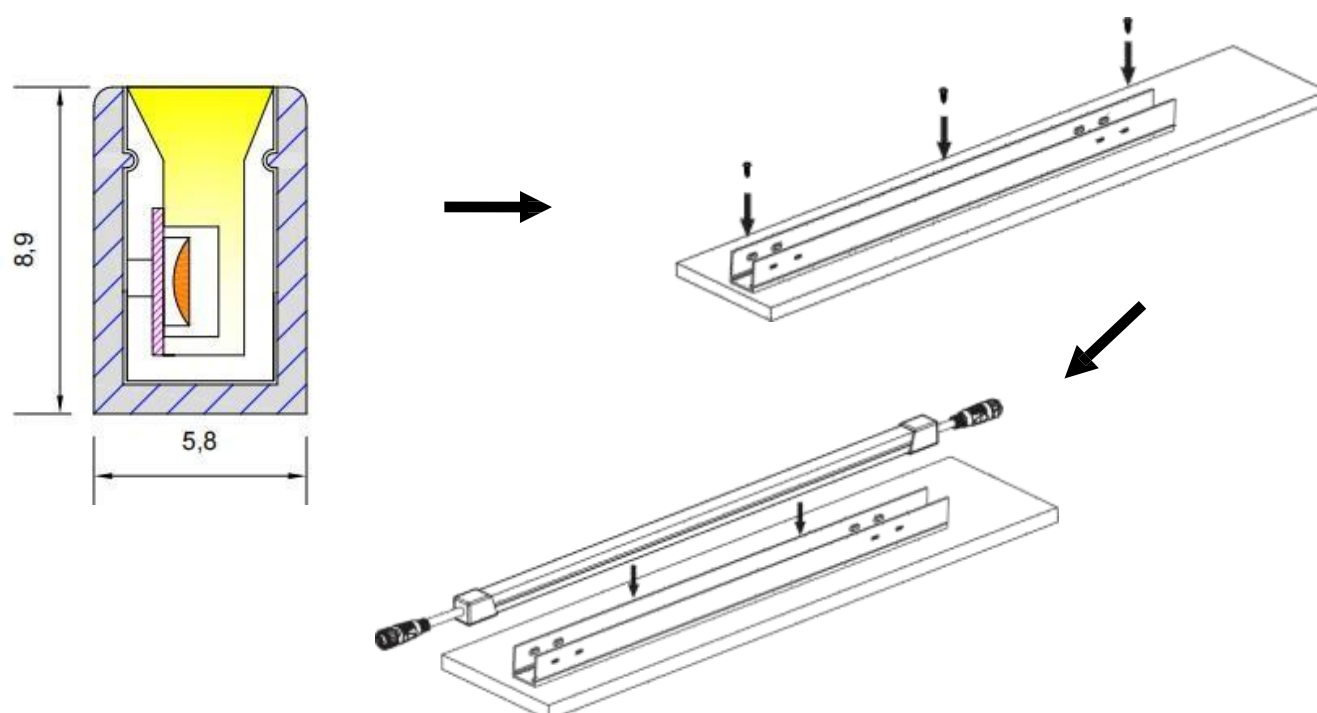

Package



Rolled into a reel



Enclosed in Electrostatic bags
装箱



Put into carton box
封装



Seal the box

Type		Items	Per carton
5 meters Per roll	Tube	----rolls	30
	Weight	----g	1060*30
	Dimension	----mm	480*370*430mm

Note: The above- mentioned packaging quantity and weight are only for the packaging method shown in the figure. There will be differences in the number and weight of packaging for other packaging methods, and the actual product shall prevail.



Notice

- Connect to the power supply in accordance with national regulations.
 - If the external flexible cable of this illuminates damaged, it shall be exclusively replaced by the manufacturer or a similar qualified person in order to avoid any hazard.
 - installation/maintenance only by skilled personnel.
 - during overhaul/maintenance only use original parts.
 - If any luminaire is subsequently modified , the person responsible for the modification shall be considered the manufacturer.
 - The manufacturer bears to liability for damage caused by inappropriate use or application.
- The final interpretation right belongs to Shenzhen Relight Technology Co.,Ltd.